



NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETERS (mm).
 2. MINIMUM CONCRETE GRADE N25.
 3. PROVIDE CENTRAL GROOVED JOINT ON DOUBLE CONCRETE DRIVEWAYS
 4. LOCATE EDGE OF DRIVEWAY 1.0m CLEAR OF SIDE BOUNDARY.
 5. CROSSING WIDTH TO BE APPROVED BY ENGINEERING DEPARTMENT BEFORE COMMENCEMENT OF WORKS

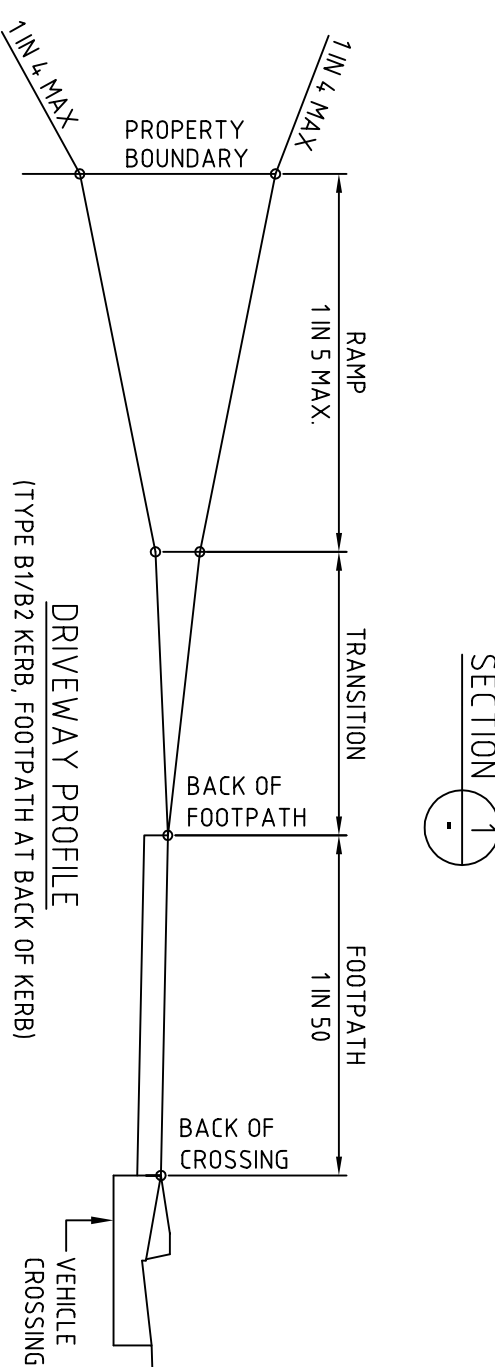

NOTE:
 DRIVEWAY PROFILES TO BE IN ACCORDANCE WITH THE REQUIREMENTS OF 'AS/NZS 2890.1:2004'

○			
D	EDGE THICKENING REVISED	03/07	
C	NMC REVISIONS	01/06	
B	DRAFTING REVISIONS	05/04	
A	REVIEW OF STANDARD DRAWING SET	01/03	
No.	AMENDMENT	APPR.	DATE

INSTITUTE OF PUBLIC WORKS ENGINEERING AUSTRALIA
TASMANIA DIVISION Inc. - 2003 DISCLAIMER.
 The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



DRAWING TITLE MUNICIPAL STANDARD DRAWING
URBAN ROADS - STANDARD VEHICLE CROSSING

SCALE NOT TO SCALE
ISSUE DATE NOV. 1997
APPROVED
DRAWING NO. SD-1008

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/Title
()
/Subject
(D:20090623150319+10'00')
/ModDate
()
/Keywords
(PDFCreator Version 0.9.5)
/Creator
(D:20090623150319+10'00')
/CreationDate
(jonathan.galbraith)
/Author
-mark-