



POST SPACING DIAGRAM

GUIDE POST SPACING ON CURVES
(INCLUDING SPACING OF GUARD FENCE DELINEATORS)

CURVE RADIUS (m)	SPACING (m)	
	ON OUTSIDE OF CURVE	ON INSIDE OF CURVE
< 100	6	12
100 - 199	10	20
200 - 299	15	30
300 - 399	20	40
400 - 599	30	60
600 - 699	40	60
800 - 1 999	60	60
1 200 - 2 000	90 (NOTE 2)	90 (NOTE 2)
> 2 000		
INCL. STRAIGHTS	150 (NOTE 2)	150 (NOTE 2)

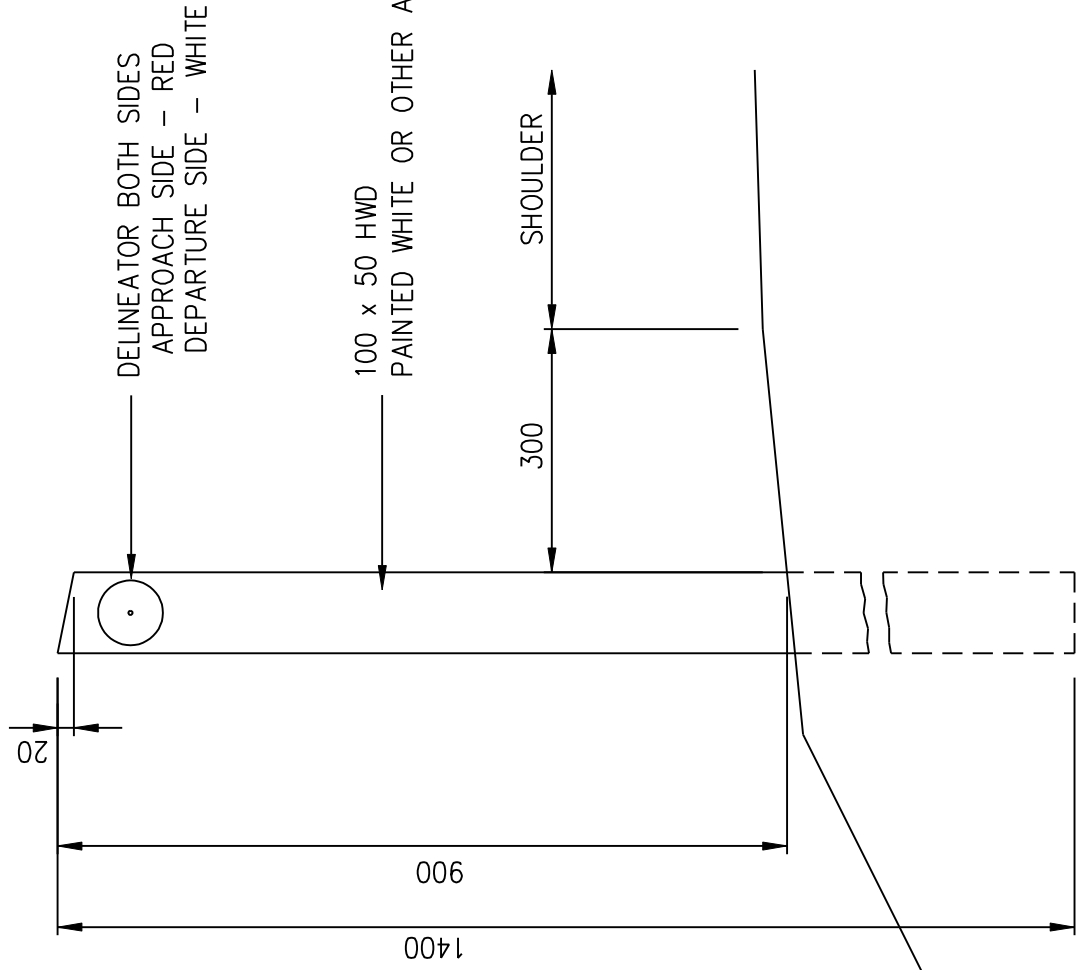

GUIDE POST DETAIL

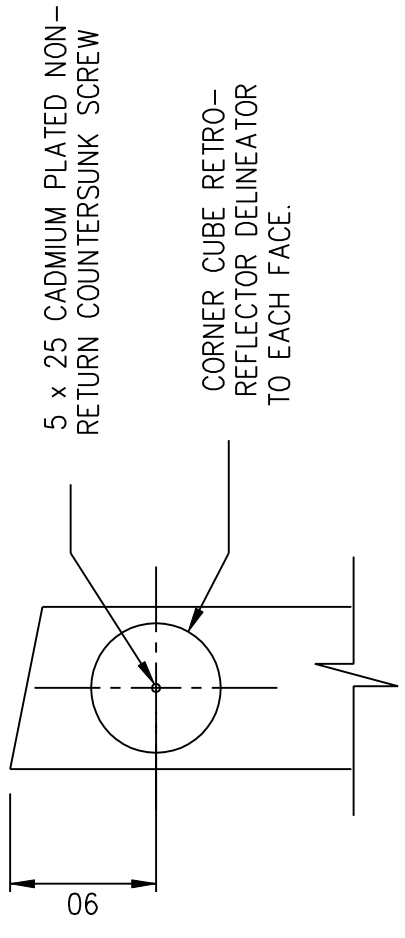


DELINEATOR DETAIL

NOTES

1. ALL DIMENSIONS IN MILLIMETRES (mm) UNLESS NOTED OTHERWISE.
2. MAXIMUM SPACING OF POSTS TO BE 150m GENERALLY OR 60m IN AREAS SUBJECT TO FOG OR ABOVE R.L. 800m AHD.
3. POSTS TO BE INSTALLED AT ALL CULVERT ENDWALLS.
4. ON ROAD STRAIGHTS POSTS TO BE INSTALLED IN PAIRS SUCH THAT AT LEAST ONE PAIR IS VISIBLE TO TRAFFIC AT ALL TIMES.
5. POSTS TO BE INSTALLED AT TANGENT POINTS OF EVERY CURVE.
6. CONTINUE GUIDE POSTS THROUGH CUTTINGS TO PROVIDE CONTINUITY OF DELINEATION TRAFFIC LANE.
7. REFER AS 1742.2 - 1999 FOR FURTHER DETAILS ON GUIDE POSTS

INSTITUTE OF PUBLIC WORKS ENGINEERING AUSTRALIA
TASMANIA DIVISION Inc. - 2003 DISCLAIMER.
The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



Drawing Title: MUNICIPAL STANDARD DRAWING
RURAL ROADS - GUIDE POSTS

Scale: NOT TO SCALE

Issue Date: NOV. 1997

Approved

Drawing No.: SD-1013

(E)			
(D)			
(C)			
(B)			
(A)	REVIEW OF STANDARD DRAWING SET	01/03	Date
No.	Amendment	Appr.	Date